



Journal of Design and Textiles (JDT)

Volume 4 Issue 2, Fall 2025

ISSN(P): 2959-0868, ISSN(E): 2959-0876

Homepage: <https://journals.umt.edu.pk/index.php/jdt/index>







- Title:** Improvement of Sigma level in a Finishing Department of Home Textile Unit Industry
- Author (s):** Muhammad Zaid Khan, Ali Zulqarnain, Muhammad Wasif, and Rabia Siddiqui
- Affiliation (s):** NED University of Engineering & Technology, Karachi, Pakistan
- DOI:** <https://doi.org/10.32350/jdt.42.01>
- History:** Received: March 13, 2025, Revised: September 26, 2025, Accepted: September 29, 2025, Published: October 15, 2025
- Citation:** M. Z. Khan, A. Zulqarnain, M. Wasif, and R. Siddiqui, "Improvement of sigma level in a finishing department of Home Textile Unit Industry," *J. Des. Text.*, vol. 4, no. 2, pp. 01–27, Dec. 2025, doi: <https://doi.org/10.32350/jdt.42.01>.
- Copyright:** © The Authors
- Licensing:**  This article is open access and is distributed under the terms of [Creative Commons Attribution 4.0 International License](https://creativecommons.org/licenses/by/4.0/)
- Conflict of Interest:** Author(s) declared no conflict of interest



A publication of
School of Design and Textiles
University of Management and Technology, Lahore, Pakistan

Improvement of Sigma Level in a Finishing Department of Home Textile Unit Industry

Muhammad Zaid Khan^{*}, Ali Zulqarnain^{}, Muhammad Wasif^{}, and Rabia Siddiqui^{}

Department of Industrial and Manufacturing Engineering, NED University of Engineering & Technology, Karachi, Pakistan

ABSTRACT The research is done on the finishing department of home textile unit, the purpose is to reduce the defects which were encountering during the finishing process, 3M is used in which man, machine and material are included has been reviewed and Root cause Analysis is done to archive better sigma level. Finishing department is serving for bleach, dyed & printed fabric, more chances of defects to be rise in Finishing side as for dying & printing, the fabric is repeated twice or thrice depending upon the print or dyed quality and parameters requirement, the sigma level before improvement was 3.31, after successful implementation of improvement and defects minimization sigma level of Finishing department was improved to 3.71 (13500 Defects per day). Thus, with the of Six sigma tools the production losses would take into control and significant amount of labor cost, time and utilities (Steam, compressed air, water and Power) would also take into control.

INDEX TERMS defects, 3M, finishing process, root cause analysis, six sigma tools

I. INTRODUCTION

Six Sigma is a statistical approach for visualizing the performance of any production part with in all era of time. It is used to keep record and to track the performance of part either in planning, Quality, procurement, production, packaging or even maintenance [1]. Concept of Six Sigma aims to provide practitioners with the means to view the process capability and improvement [2]. Few sectors of manufacturing like Aerospace, Cell phones, Health care, Military, Retail and E- Commerce and Supply of Food from home to market have achieved Sigma level at highest level that is Six Sigma.

Many industries are still not implementing Six Sigma, due to Lower knowledge and techniques are only applicable in industry for the quality

*Corresponding Author: muhammadzaidk52@gmail.com

improvement in some particular sector like manufacturing [3]. Few multinational companies in Pakistan are using six sigma approaches to maintain their production only. On Microscopic level it seems to be implemented but not on Macroscopic level. Parameters include the size, quality and scale to implement the Six Sigma in industry are essential for an industry to boost its production or to lower its losses [4].

As the scope of this research is to improve the Sigma level of Production with the aim of 3M methodologies, hence the technical prospect of finishing process of home textile fabric is also kept in consideration. In a home textile unit, there are eight different types of processes are performed, starting from singeing, bleaching, mercerization, bleach mercerize, pigment printing, reactive printing, dyeing to finishing process. Mainly 4 main departments hold these processes named as Pretreatment department in which Singeing, Bleaching and Mercerizing processes [5] are included. Secondly, where all types of dyeing come is Dyeing department [6], all kind of printing in Printing department [7] and in the last Finishing department [8] that deals in Calendaring, Stenter, Sanforizes. Moreover, finishing department also serves in intermediate process for Pretreatment, dyeing and Printing departments as per the process requirements. So, a huge load of processing on Finishing department. Many reasons there in home textile cause lower production as Quality losses in which reprocessing in textile is amongst them [9]. LSS tools (DMAIC, VSM, 5S, SPC, etc.) are used in textiles. It has been seen that in home textile that about 5-6 % of the actual production fabric count for reprocessing is quality related issues that occurs from man, machine and material respectively.

Six Sigma Technique has taken into action in order to minimize the overprocessing and reprocessing. Six sigma tools help in lowering the defects in Finishing department which was highlighted, and by encountering these defects to get better results ultimately reducing the reprocessing.

II. METHOD

Six Sigma applies two of the best-known process-improvement methodologies currently practiced, widely used by organizations for realizing substantial gains in cost savings, quality, and cycle time through process performance gains. Lean Sigma unites the complex methods of lowering variability from Six Sigma and waste elimination and removal of

non-value-adding activities from Lean Manufacturing and integrating them into a holistic approach towards process excellence [10]. Six Sigma follows the DMAIC methodology, which stands for Define, Measure, Analyze, Improve, and Control. This structured approach helps organizations systematically improve processes and enhance overall performance. Basic tools and techniques used in the DMAIC method is represented by Figure 01.

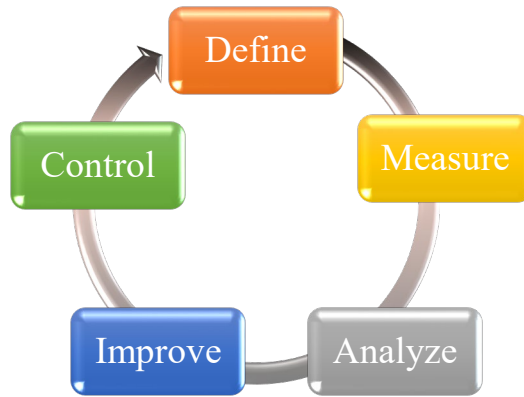


FIGURE 1. DMAIC circle

During the step of defining, the research problem is defined. Four key departments of the assigned home textile plant are considered: Pre-treatment department, dyeing department, printing department, and Finishing department. Furthermore, to ensure reproducibility and credibility, the study incorporates a clear sampling process, well-defined selection of performance metrics, and systematic data collection methods, which provide a transparent foundation for the analysis and subsequent improvements. Key performance metrics considered in this study include defect rate, defects per million opportunities (DPMO) with corresponding sigma levels, first pass yield, rework and scrap cost, cycle time, on-time delivery, and outgoing quality level (OQL). These indicators were selected to capture both the quality and efficiency dimensions of process performance across the four departments of the textile plant, namely pre-treatment, dyeing, printing, and finishing. Data for these metrics was collected through a combination of production records and quality logs, stratified random sampling of batches, inspection check sheets, and control charts to categorize and monitor defects. In addition, direct observations and time studies were carried out to measure actual cycle times and identify

bottlenecks, while operator interviews and surveys were conducted to gain insights into process variations and human factors. Customer complaint records and feedback were also reviewed to link internal defect trends with external quality performance.

There are impurities such as dust particles and other contaminants commonly found in both natural and synthetic fibers. Additionally, secondary impurities may be introduced during spinning, knitting, and weaving processes, affecting fiber quality [11]. In Pretreatment department Singeing process is use to remove the burr from the fabric followed by bleaching process. In the pre-treating process, all the impurities influencing the process of dyeing and printing in a negative fashion are washed away. Pre-treating includes de-sizing, scouring, and bleaching, and these facilitate smooth processes of future dyeing and softening. But different processes of pre-treating of de-sizing, scouring, and bleaching can drastically lower the quality of the product, producing uneven coloration and lower fastness. Pre-treatment process is represented by Figure 2.

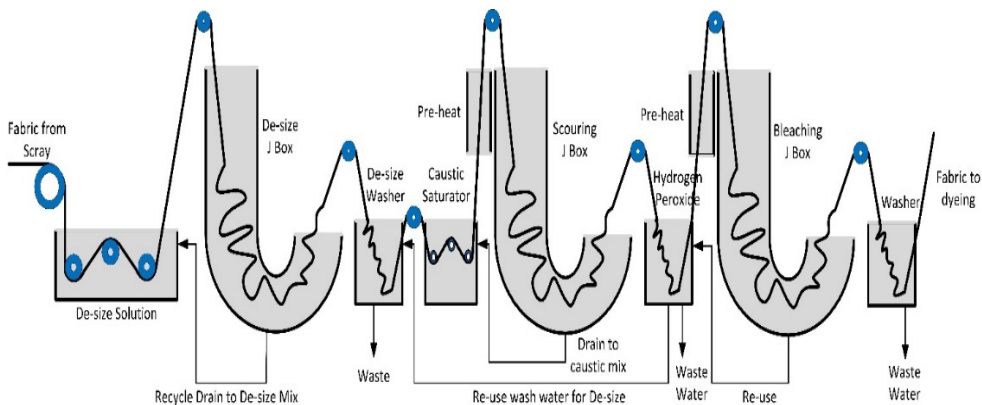


FIGURE 2. Pre-Treatment of fabric

During the pre-treating, all the impurities with negative effects on dyeing and printing are washed. De-sizing, scouring, and bleaching, enabling smoother processes of dyeing and softening, are undertaken. But differences in pre-treating processes of de-sizing, scouring, and bleaching can significantly reduce the quality of the product, producing uneven color and lower fastness, dyeing process is represented by Figure 3.

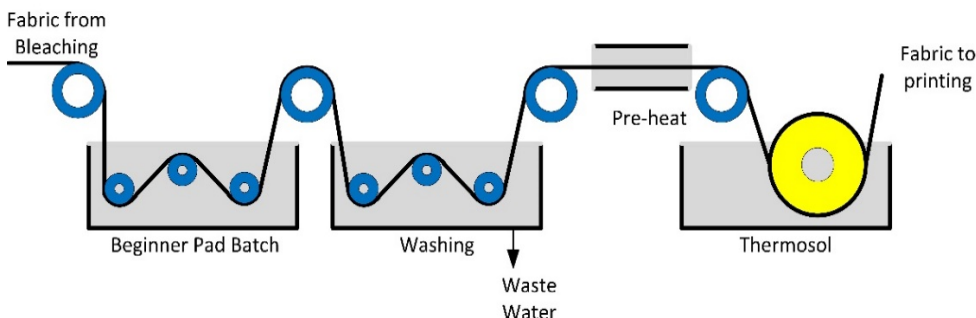


FIGURE 3. Dyeing process

Textile Printing is a technique of ornamentation of cloth with color, dyes, and other chemicals in printed forms. Apparently evolved from hand-painted cloth, such processes are centuries old. Printing methods are classified into the categories of direct, discharge, and resist. With direct printing, color paste coats the cloth directly. In Figure 4 Roller printing process is displayed which is one of the printing techniques.



FIGURE 4. Roller printing (fabric)

In wet processing, the finishing department is responsible to play the crucial role to make complete home textile products. Once sewing performance is achieved, fabric is transferred to the finishing department to receive the finishing touch. Two of the very key determinants of where a product is placed in the market are finishing and packaging. The finishing process has a range of steps, such as Equalizing, conducted with stenters. In this step,

heat treatment of cloth controls its width, moisture, spirality, and shrinking. Followed by Calendaring process which makes fabric smooth, thin and coated [12]. One more process is Sanforizes which is used to avoid shrinkage specially in woven fabric.



FIGURE 5. Stenter machine for finishing and equalizing processes

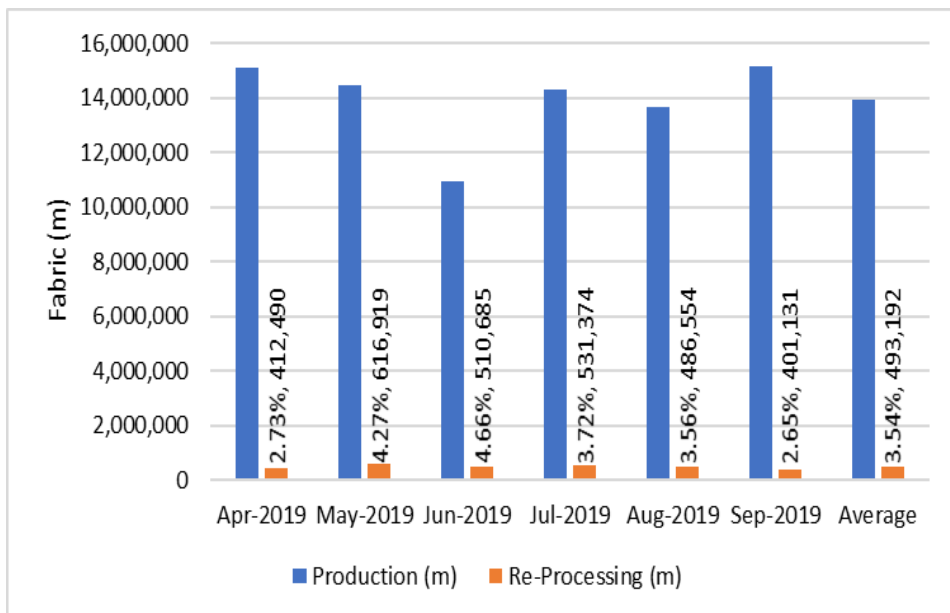


FIGURE 6. Month-wise production and rework in fabric

In the home textile unit, the main products include bed sheets, curtains, and pillow covers, along with various other items made from lawn and cotton

fabrics, catering to diverse household needs [13]. The unit also has an average monthly production of about 14 million meters of fabric. Following bar-graph (Figure 6), this data shows a comparison between the total fabric production and the amount of re-processed fabric over a six-month period, from April 2019 to September 2019.

On average, 0.5 million meters of cloth are being reprocessed on a monthly basis, of which 55% of them need re-equalization and 45% of them need re-finishing, generating quality cost, mostly internal failure cost. From the data provided, a floor survey has been conducted for identifying the root causes of major defects, and their frequencies of occurrence, for causing reprocessing [14]. Figure 6 and 7 illustrates the Pareto chart showing the frequency of defects occurring during the most common re-processing stages, namely re-equalizing and re-finishing. As shown in Figure 6, it is evident that 92.5% of the defects are due to width shortages and operator negligence. Figure 7 clearly shows that 95% of the defects are attributed to grease marks, hand feel, design deviations, and stain marks. Therefore, it can be concluded that controlling these six defects could lead to significant savings in re-processing costs. Based on the above-mentioned data, the sigma level of the current process can be calculated, which is shown in Table 1.

TABLE I
SIGMA LEVEL OF THE FINISHING PROCESS BEFORE
IMPROVEMENT

Opportunities	Defects	Defects Per Million Opportunities (DPMO)	Sigma Level (As per Six Sigma Table)
13,941,501 m	493,192 m	35,376	3.31

Thus, by identifying the major defects and determining the sigma level, the study progresses to the analysis.

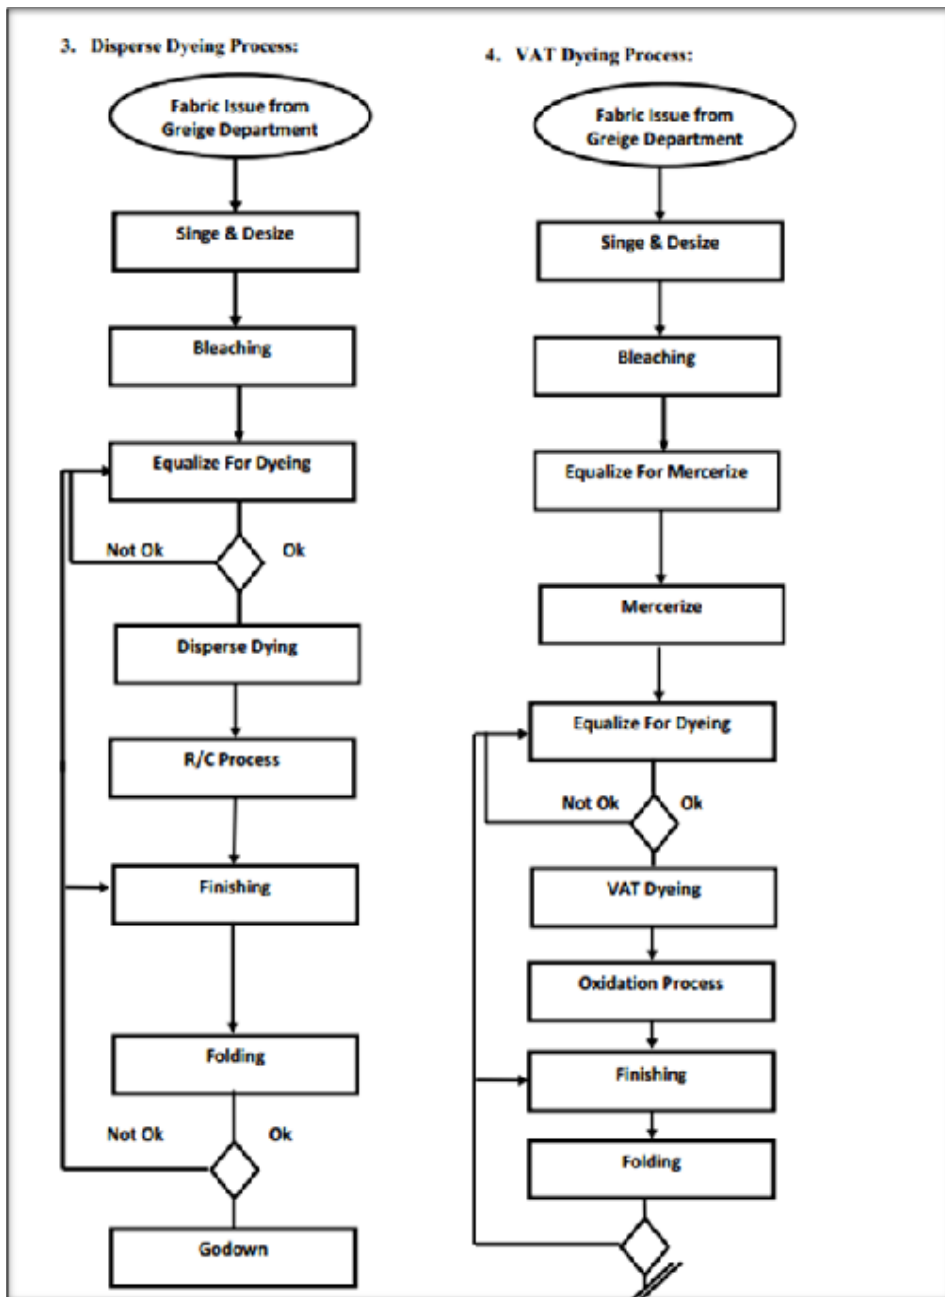


FIGURE 7. Process flow chart of dyeing processes with finishing department role as highlighted.

A. ANALYSIS

Minimizing defects is crucial for ensuring product quality. Producing high-quality products is essential to remain competitive in the global market. This study adopts the Lean Six Sigma methodology to identify the major defects, analyze their root causes, and propose effective solutions to minimize these defects. By effectively utilizing the techniques of Six Sigma, key issues are identified, and wastage, and its impacts, are minimized [15]. This directly contributes towards quality and production efficiency improvement, reducing production delays, reducing usage of chemicals, reducing usage of utilities, and ultimately, customer satisfaction.

TABLE II
MONTHLY PRODUCTIONS WITH REPROCESSING

Month	Production (M)	Re Process (M)	Re Process Categories	
			Re Finish (M)	Re Equalize (M)
Apr-18	15,106,983	412,490	149,710	262,780
May-18	14,463,375	616,919	343,809	273,110
Jun-18	10,951,690	510,685	202,120	308,565
Jul-18	14,302,620	531,374	227,249	304,125
Aug-18	13,664,273	486,554	163,924	322,630
Sep-18	15,160,069	401,131	203,151	197,980
Total (m)	83,649,010	2,959,153	1,289,963	1,669,190
Average (m)	13,941,501	493,192	214,933	278,198

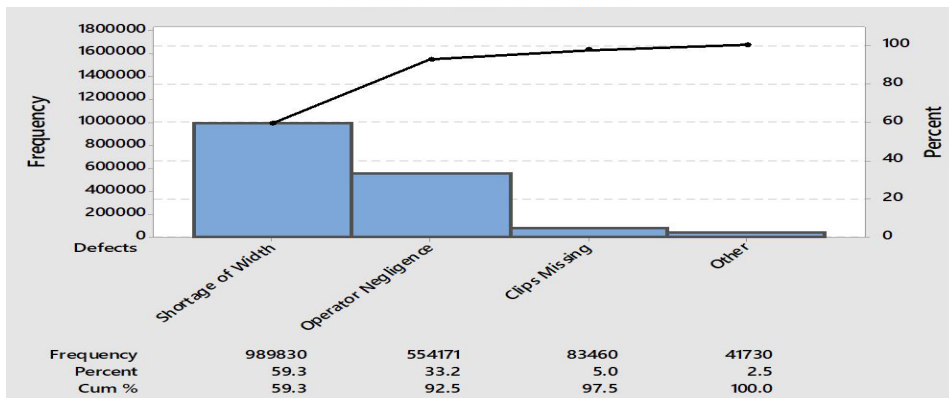


FIGURE 8. Pareto chart for defects arrived during re-equalizing process

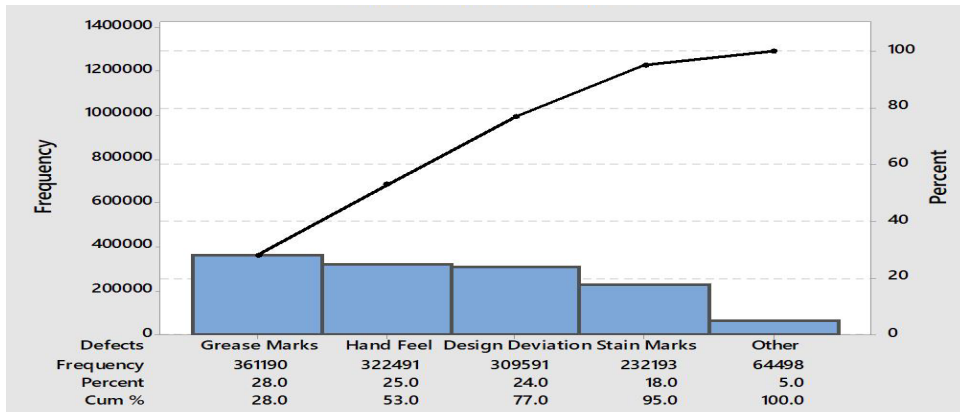


FIGURE 9. Pareto chart for the defects occurred during re-finishing process

B. ROOT CAUSE ANALYSIS

Root cause analysis is the process of identifying the underlying issues that must be addressed for a program to achieve its vision. Simply using SBCC methods to address only the surface-level factors of a problem will not lead to effective solutions. Parallel with the practice of the technique of the Five Whys, this process ensures companies can find the root of a flaw and act on this, rather than treating only the overt "sign" of the problem [16]. An example of a typical root cause analysis for the problem identified can be viewed in the chart of RCA. Typical root cause analysis for the defined problem is shown in the RCA chart below:

TABLE III

ROOT CAUSE ANALYSIS OF REPROCESSING ISSUES

Input (Cause)		Process	Output (Effect)
1	Shortage of Width Issue	Man: Caused by operator negligence in setting the defined parameters.	The whole lot goes for re equalizing.
		Machine: Resulting from maintenance issues.	
		Method: The fabric was delivered with a shorter width due to the prioritization process (Greige).	

	Input (Cause)	Process	Output (Effect)
2	Clips missing	Machine: Low Maintenance of machines. Man: No focus on machine performance. Method: Issues in chemical preparation.	Fabric often goes for shortage of width, bowing and skewing issues.
3	Stains Marks	Material: Problems related to dyes and silicon. Machine: Burner-related issues. Man: Less Expertise.	Stain marks on the fabric, particularly after folding, lead to returns, making it a critical issue.
4	Hand feel	Machine: Improper grinding of the rolls. Method: Absence of Lico. Man: Lack of focus on the MAHLO system (the bow and skew setting mechanism).	From the Customers fabric return and it's reprocessed.
5	Deviation of Design	Machine: MAHLO malfunctioned or halted due to an issue. Man: Negligence.	The fabric is returned from printing for re-equalization.
6	Crease Marks	Method: Due to urgency, the fabric was delivered from the last process at a higher RPM.	Fold department returns the lot.
7	Operator Negligence	Man: Lack of trainings, No focus on machine/process. Man: No focus on Preventive Maintenance.	Due to this issue fabric re equalize as well as refinish issues generate.
8	Machine Issue	Machine: Machines set parameters not achievable. Method: SOPs not following/ No Proper SOPs.	Oil stains, clips missing, burnt spot issues were found on fabric.

C. FAILURE MODE AND EFFECTIE ANALYSIS

Failure Mode Effects Analysis (FMEA) is a method used to quantify and prioritize risks in a process, product, or system, followed by implementing measures to minimize these risks. The first step in FMEA is to analyze the functional requirements and their potential effects to identify all possible

failure modes. Data for this analysis is gathered through surveys, floor visits, and questionnaires.

D. SURVEY

A Survey was conducted with the help of google forms and questionnaires with the machine operators, heads and in charges.

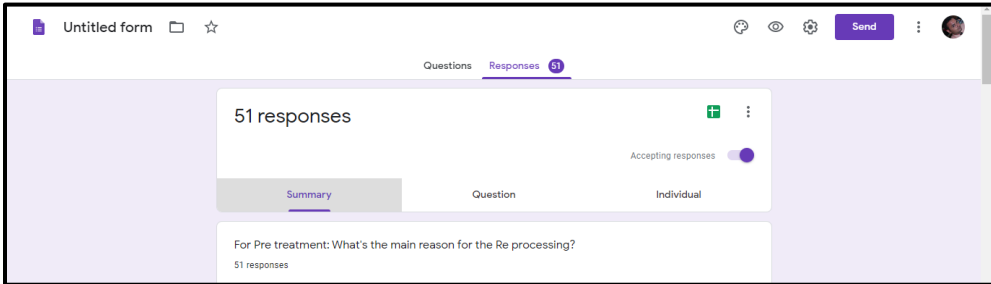


FIGURE 10. Display of surveys responses (google forms)

E. RISK PRIORITY NUMBER (RPN)

The Risk Priority Number (RPN) is an arithmetic value used to assess the risk associated with a process or its individual steps within the context of Failure Mode and Effects Analysis (FMEA). The RPN is determined after completing the initial groundwork steps of the analysis.

III. RESULTS

A. DATA COLLECTED FROM SURVEY

Following data that is represented by Table 4 shows the causes for the reprocessing.

TABLE IV
REPROCESSING CAUSES

S.No.	Failures	Effects
1	Shortage of Width Issue	The whole lot goes for re equalizing.
2	Clips missing	Fabric often goes for shortage of width, bowing and skewing issues.
3	Stains Marks	The presence of stain marks on the fabric, particularly after folding, leads to returns, making it a critical issue.

S.No.	Failures	Effects
4	Hand feel	From the Customers fabric return and it's reprocessed.
5	Design Deviation	Fabric returns from the printing to re equalize/ Engineering design issues
6	Crease Marks	Fabric returns from fold.
7	Operator Negligence	Due to this issue fabric re equalizes as well as refinish.
8	Machine Issue	Oil stains, clips missing, burnt spot issues were found on fabric.

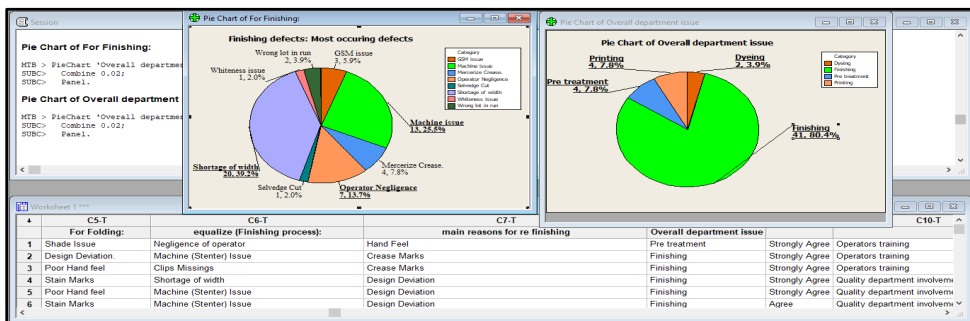


FIGURE 11. Defects calculation from online survey and questioners

B. FOR RISK PIORITY NUMBER

1) SEVERITY LEVEL CALCULATIONS

Severity is the seriousness of failure consequences of failure effects. Usual practice rates, failure effect severity (S) on a scale of one to 10 where one is lowest severity and 10 is highest by ASQ.

TABLE V
OCCURRENCE LEVEL DESCRIPTION

S. No.	Failures	Occurrence
1	Shortage of Width Issue	6
2	Clips missing	8
3	Stains Marks	9
4	Hand feel	7
5	Design Deviation	5
6	Crease Marks	6
7	Operator Negligence	5

Once remedial actions are determined, the next step is to test their efficacy and efficiency. Additionally, the design should be verified, and the inspection procedures must be clearly specified.

TABLE VI
SEVERITY LEVEL DESCRIPTION

Severity level	Consideration
1	Very low severe (With intolerance)
2-3	Severe (Low)
4-5	Medium, Severe
6-7	Severe (CTQ)
8-9	Severe (Move for Reprocess)
10	Highly severe (Whole lot will be rejected)

TABLE VII
RESULTS OF SEVERITY OF REPROCESSING

S.No.	Failures	Severity
1	Shortage of Width Issue	3
2	Clips missing	2
3	Stains Marks	5
4	Hand feel	7
5	Design Deviation (Engineering Design)	5
6	Crease Marks	4
7	Operator Negligence	3

C. DETECTION LEVEL CALCULATIONS

TABLE VIII
DETECTION LEVEL DESCRIPTION

Detection Level	Consideration
1	Very Detection severe (With intolerance)
2-3	Detection (Low)
4-5	Medium Detection
6-7	Detection (CTQ)
8-9	Detection (Move for Reprocess)
10	Highly Detection (Whole lot will be rejected)

TABLE IX
RESULTS OF DETECTION OF REPROCESSING ISSUES

S.No.	Failures	Detection
1	Shortage of Width Issue	9
2	Clips missing	9
3	Stains Marks	7
4	Hand feel	4
5	Design Deviation	4
6	Crease Marks	3
7	Operator Negligence	1

D. OCCURRENCE LEVEL CALCULATIONS

TABLE X
OCCURRENCE LEVEL DESCRIPTION

Occurrence Level	Consideration
1	Very low occurrence (With intolerance)
2-3	Occurrence (Low)
4-5	Medium Occurrence
6-7	Occurrence (CTQ)
8-9	Occurrence (Move for Reprocess)
10	Highly Occurrence (Whole lot will be rejected)

TABLE XI
RESULTS OF OCCURRENCE OF REPROCESSING ISSUES

S.No.	Failures	Occurrence
1	Shortage of Width Issue	6
2	Clips missing	8
3	Stains Marks	9
4	Hand feel	7
5	Design Deviation	5
6	Crease Marks	6
7	Operator Negligence	5

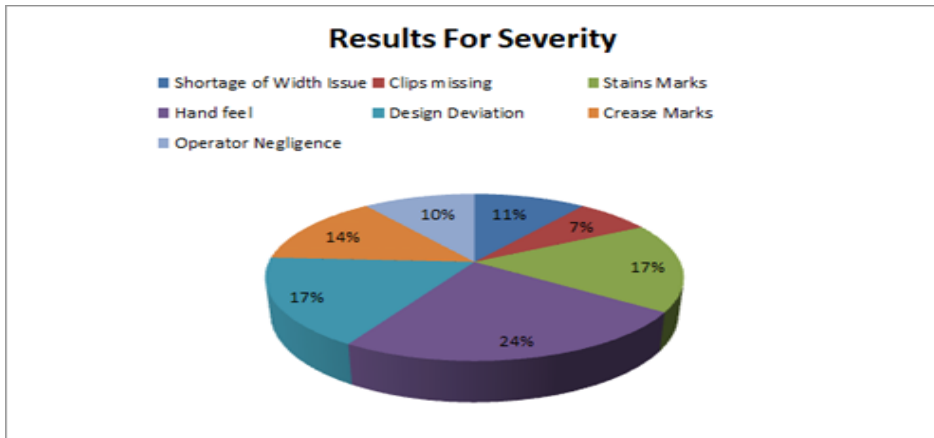


FIGURE 12. Pie charts for %severity

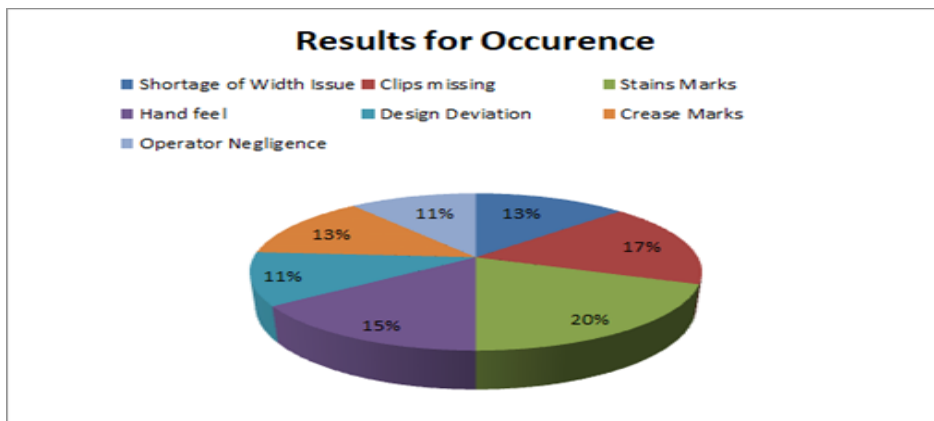


FIGURE 13. Pie charts for % occurrence

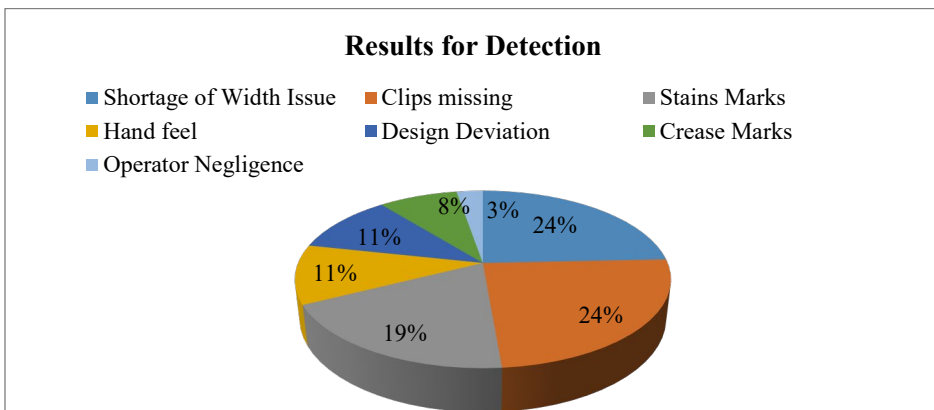


FIGURE 14. Pie chart for the % detection of defects

E. RISK PRIORITY NUMBER CALCULATIONS

TABLE XII
RPN NUMBER CALCULATION

S.No.	Failures	Severity (S)	Occurance (O)	Detection (D)	RPN=S*O*D
1	Shortage of Width Issue	3	6	9	162
2	Clips missing	2	8	9	144
3	Stains Marks	5	9	7	315
4	Hand feel	7	7	4	196
5	Design Deviation	5	5	4	100
6	Crease Marks	4	6	3	72
7	Operator Negligence	3	5	1	15
Total RPN					1,004

The current RPN number extracted and it is needed to reduce that number having high RPN number ($S*O$) so that reprocessing can also be minimized. Ranking by RPN will be:

Highest: Stain Marks ($RPN = 315$) → critical issue. then Hand Feel ($RPN = 196$), Shortage of Width (162), Clips Missing (144) to Lowest: Operator Negligence (15). This ranking is important for prioritizing corrective actions.

As per Pareto Analysis (80/20 Rule): Total RPN = 1004. Cumulative contributions will be: Stain Marks = 31.4%, Hand Feel = 50.9%, Shortage of Width = 67.0%, Clips Missing = 81.4%

Whereas, Descriptive Statistics: Mean RPN = 143.4, Standard deviation ≈ 91.5 (shows high variability across failure modes), Outlier: “Stain Marks” far exceeds average risk.

Most of the issues are generating due to width shortage and operator negligence. Due to crease marks and hand feel most of the issues are generating. The major defects observed in the finishing process are varied

in nature. Shortage of width often occurs due to frequent stoppages between mercerization and drying, which produce non-uniform fabric widths. Clips missing is another common defect, usually arising from operator negligence, high machine speeds, or poor maintenance and greasing of clips. When clips fail to hold the fabric properly, the heat-setting process causes burns or the appearance of yellow strip shades. Similarly, machine-related issues are significant, since preventive maintenance is often neglected. Problems such as faulty burners, improper temperature settings, and irregular machine speeds lead to friction marks, jerks, and yellow stain formation. Operator negligence also plays a role, with machines frequently being run above or below standard speeds, or on bypass modes that skip necessary processing steps. Crease marks are generated when the batcher folds fabric abruptly, or during mercerization when damp fabric runs at high speed in a twisted form, resulting in visible creases. A further issue is the hand feel of the fabric, which deteriorates when operators fail to perform timely checks during folding operations, reflecting a lack of supervision. Stain marks are another persistent defect, caused by a variety of factors including dye droppings, rust, oil or zinc particles, and bubble formation in the troughs or chemical tanks of finishing machines. They can also originate in the pretreatment stage, while Sanforizer belt marks and improper padder cleaning exacerbate the issue. Other recurring problems include mixed fabric quality, rassa, selvedge cuts, and inadequate cleaning of rolls, troughs, and chemical tanks between shade changes, along with incorrect temperature settings, all of which compromise fabric quality.

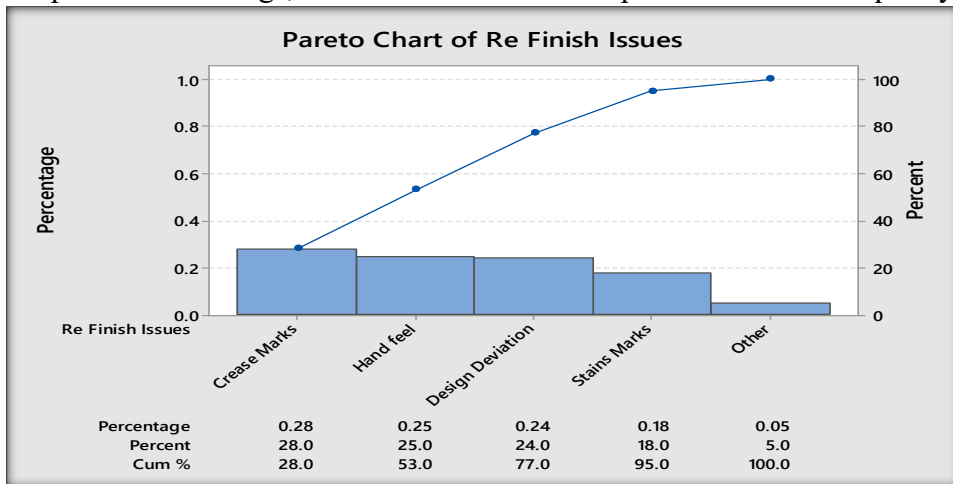


FIGURE 15. Pareto chart of refinish defects

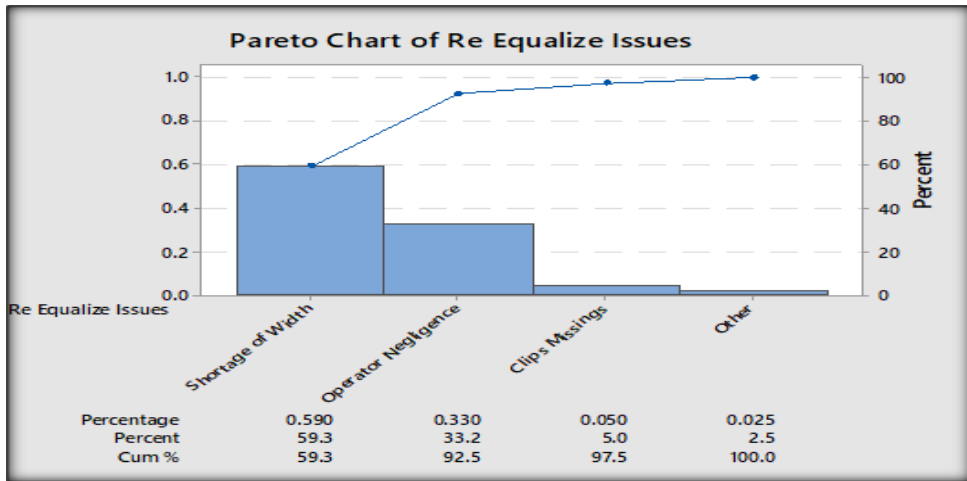


FIGURE 16. Pareto Chart of Re equalizing issues

F. REMEDIAL ACTIONS

So in order to reduce these defects following actions are taken:

1. The initial step was to focus on the process. Some fabric was incorrectly released from the Greige department, causing shortages in processing. To address this, a mail system was introduced to report fabric shortages in terms of width and length. This system enabled the responsible department or personnel to monitor and correct these errors. Additionally, the Greige department implemented.
2. Improvements, including batchers with proper labeling using the 5S methodology, which helped minimize width shortages and other quality defects.
3. The second crucial action taken was the preventive maintenance of machines to ensure their proper functioning and maximum efficiency. Furthermore, machine overhauling was carried out, significantly reducing the need for fabric reprocessing.
4. An air audit was conducted to investigate padder pressure, as issues related to padder pressure and shade variations were observed. The audit assessed compressed air concerns, enabling necessary corrective measures to be taken to resolve shade variation problems.
5. Stenter pick-up tests were carried out to test the performance of the padders. 70-80% pick-up rate should be achieved for even coloration, and anything else can lead to colour variations and stains. During the testing, some of the padders were found to be inoperable due to incorrect

operator settings, faulty gauges, or because the paddler grinding was due. All the issues were fixed with the grinding of the padders and the adjustment of air pressure to the standard 4 Bars

6. A reprocessing sheet system has been introduced for tracing reprocessing of the cloth, not only in finishing, but also in other sections. The sheets are finalized by the department and approved by the Processing's General Manager. The system ensures errors and corrective action are communicated with top management. With this approach, reprocessing processes in every department are tracked, and prevention of defects in the cloth.
7. Operator training programs were organized to equip them with the skills to operate machines in the absence of senior representatives and handle quality-related issues. Staff and operator training is an integral part of Six Sigma implementation, making it a mandatory compliance activity. Operators received training in 5S, Poka-Yoke, and Kaizen, helping them maintain an organized work environment with minimal waste.

Through continuous efforts and improvements in the system, a reduction in defects has been observed, resulting in an improved sigma level. The attached table illustrates the progress rate.

G. RPN AFTER SIX SIGMA IMPLEMENTATIONS:

TABLE XIII

RISK PRIORITY NUMBER AFTER TAKEN ACTIONS

S.No.	Failures	RPN (Before)	Severity	Occurrence	Detection	RPN=S*O*D (After)
1	Shortage of Width Issue	162	3	3	9	81
2	Clips missing	144	2	4	9	72
3	Stains Marks	315	5	4	7	140
4	Hand feel	196	7	5	4	140
5	Design Deviation	100	5	3	4	60
6	Crease Marks	72	4	2	3	24
7	Operator Negligence	15	3	4	1	12
	Total RPN before	1,004		Total RPN after		529

TABLE XIV
IMPROVEMENT IN SIGMA LEVEL MONTH WISE PERFORMANCE
REPORT

Month	Production (m)	Reprocess (m)	Reprocess Categories		Sigma Level
			Refinish (m)	Re equalize (m)	
OCT	15548845	492187	256743	235444	3.36
NOV	14688145	376371	145698	230673	3.45
DEC	11887254	216312	102998	113314	3.59
JAN	13207570	473415	107654	365761	3.30
FEB	11829979	152156	100578	51578	3.73
Total	67161793	1710441	713671	2424112	
Avg	13432359	342088	142734	484822	

After the successful implementation of Six Sigma, the following fruitful results were achieved: A 31% reduction in reprocessing. An improvement in the sigma level from 3.31 to 3.73.

TABLE XV
COST SAVINGS DUE TO SUCCESSFUL IMPLEMENTATION OF
IMPROVED STEPS

Working	Cost Incurred
Preventive Maintenance of Machines	Rs. 250,000 (Approximately)
Over Hauling of Machines	Rs. 10,000,000 (Fixed Cost)
Air Audit	Rs. 5,00,000
Project Savings (As Per 493,132 mtr. reprocess)	
Control Over Reprocessing (Nov-18)	Rs. 299,182/ Month
Control Over Reprocessing (Dec-18)	Rs. 686,524/ Month
Control Over Reprocessing (Jan-18)	Rs. 64,336/Month
Control Over Reprocessing (Feb-18)	Rs. 900,000/ Month
Total Savings (Nov-Feb)	Rs. 1,892,042

IV. DISCUSSIONS

This research primarily aimed at reducing production losses, which were most significant in the Finishing Department of the textile manufacturing process. Six Sigma methodologies and tools, including Root Cause Analysis (RCA), Failure Modes and Effects Analysis (FMEA), and the calculation of the Risk Priority Number (RPN), were employed to achieve this goal, the study successfully identified and quantified areas of loss, which subsequently enabled targeted improvements. The application of

these quality tools facilitated a data-driven approach to minimize inefficiencies and resulted in a significant reduction in fabric reprocessing. As a direct outcome, a total of 493,132 meters of fabric was saved from being reprocessed, showcasing the effectiveness of this structured problem-solving approach [17]. The Pareto Chart, one of the core tools in quality management, was instrumental in identifying and prioritizing the most critical factors contributing to reprocessing [18]. The analysis revealed that the majority of losses stemmed from two major categories: *Re-equalize* and *Re-finish*. The *Re-equalizing* issues were predominantly caused by width shortages and operator negligence [19]. To tackle these challenges, targeted training sessions were conducted for operators, focusing on fabric handling techniques, machine operations, and the correct use of chemical compositions. Additionally, the issue of width shortage was addressed through the implementation of a systematic tracking mechanism for batchers and by ensuring proper handling of fabric across multiple stages namely Greige, Bleach, Dyeing, Printing, and Finishing departments. On the other hand, *Re-finishing* issues were mainly associated with defects like crease marks and improper hand feel of the fabric. These were resolved by introducing standardized control techniques such as the Padder Pickup Test, as well as rectifying problems like missing clips and fabric handling errors [20]. By focusing on both technical and human factors namely Man, Machine, and Material the study enabled the implementation of improved staffing strategies and operational controls. ultimately, the combined effect of these interventions led to a significant enhancement in the overall production efficiency [21]. Not only did it reduce the rate of fabric reprocessing, but it also contributed to tangible savings in utilities, manpower, labor costs, and production time, thereby supporting on-time delivery schedules. Furthermore, the research had a positive environmental impact by lowering the carbon footprint associated with repeated processing [22]. In beyond causing fabric transportation to be pushed back, reprocessing additionally adds labor and inventory costs, consumes excessive amounts of manufacturing chemicals and utilities, and reduces sigma [23]. DMAIC tools (DPMO/sigma, Ishikawa, and Pareto). displays a change in performance in a clothing setting shortly after DMAIC [24]. Using traditional methods, DMAIC quality improvement reports a reduction in sewing errors. Using DMAIC+JIT to address costs of inventory in a textile plant shows that cost control is a legitimate Six Sigma goal how goes beyond defects [25]. OQL (Outgoing Quality Level) losses will be

reduced by DMAIC by 2024. examines three months' worth of clothing data; high monetary quality losses are addressed using DMAIC, which evaluates both the economic impact and quality gains [26]. The reliability and reproducibility of the study findings were enhanced by this multifaceted approach to data collection, which assured both quantitative relevancy and qualitative depth [27]. This research thus demonstrates how the application of Six Sigma tools can drive substantial improvements in quality, productivity, and sustainability in textile manufacturing.

A. CONCLUSION

The system has been able to achieve significant performance improvement and working efficiency. The adoption of Six Sigma has been made with the view of being a strategy for innovations for competitiveness in the 21st century. The strategy has three pillars, including statistical measurement, strategy for management, and quality-oriented culture. However, improvements such as standardization, Kaizen, and 5S come at no extra cost yet yield substantial positive impacts. Additionally, training programs and informed decision-making help minimize reprocessing losses. Achieving continuous improvement in the system is difficult, mainly because these organizations typically operate in a non-projectized structure. Therefore, shifting towards a projectized or hybrid model is necessary. Teamwork plays a vital role in enhancing system efficiency by ensuring tasks are completed with accountability and responsibility. Given the textile industry's high level of variations and defects at every stage, it serves as an ideal sector for Six Sigma implementation. Rapid and effective execution of Six Sigma methodologies can significantly enhance a company's future success. The analysis was based on a limited number of departments and a specific time frame, which may restrict the generalizability of the findings across the broader textile sector. Furthermore, external variables such as supply chain disruptions, raw material variability, and market dynamics were not fully incorporated into the scope of the study. Future work should therefore consider longitudinal studies across multiple textile plants, integrating supply chain factors, digital monitoring tools, and sustainability-oriented metrics to provide a more holistic view of Six Sigma's impact. Exploring hybrid approaches that combine Six Sigma with Industry 4.0 technologies and advanced analytics could also further strengthen competitiveness in this highly variable industry.

Author Contribution

Muhammad Zaid Khan: conceptualization, formal analysis, methodology, writing – original draft. **Ali Zulqarnain:** data curation, investigation, methodology, supervision, validation, writing – review and editing. **Muhammad Wasif:** formal analysis, investigation, project administration, software, supervision, visualization, writing – review and editing. **Rabia Siddiqui:** data curation, resources, validation.

Conflict of Interest

The authors of the manuscript have no financial or non-financial conflict of interest in the subject matter or materials discussed in this manuscript.

Data Availability Statement

The data associated with this study will be provided by the corresponding author upon request.

Funding Details

No funding has been received for this research.

Generative AI Disclosure Statement

The authors did not use any type of generative artificial intelligence software for this research.

REFERENCES

- [1] G. Kolhe, V. Upadhyay, and Y. Ladhe, “A study on implementation of Six Sigma process in industry,” *Int. J. Adv. Res. Ideas Innov. Technol.*, vol. 3, no. 8, Art. no. V3I8–1168, 2018.
- [2] P. Jirasukprasert, J. A. Garza-Reyes, V. Kumar, and M. K. Lim, “A Six Sigma and DMAIC application for the reduction of defects in a rubber gloves manufacturing process,” *Int. J. Lean Six Sigma*, vol. 5, no. 1, pp. 2–22, Feb. 2014, doi: <https://doi.org/10.1108/IJLSS-03-2013-0020>.
- [3] T. M. Ibrahim, “Implementation of Lean Six Sigma in the yarn manufacturing: A case study,” *J. Text. Apparel Technol. Manag.*, vol. 10, no. 12, pp. 1703–1715, Dec. 2019.
- [4] M. Zaman, S. K. Pattanayak, and A. C. Paul, “Study of feasibility of Six Sigma implementation in a manufacturing industry: A case study,” *Int. J. Res. Eng. Technol.*, vol. 3, no. 1, pp. 96–100, 2017.
- [5] Asaduzzaman, M. Mir, F. Hossain, X. Li, Zakaria, and H. Quan, “A study on the effects of pre-treatment in dyeing properties of cotton fabric and impact on the environment,” *J. Text. Sci. Eng.*, vol. 6, no. 5, 2020, Article e5, doi: <https://doi.org/10.4172/2165-8064.1000274>.
- [6] A. R. Natarajan and S. Kumar, “Revolutionizing textile dyeing: Investigating water-saving strategies from a research perspective,” *Int. J. Creat. Res. Thoughts*, vol. 12, no. 7, pp. b239–b245, 2020.

- [7] J. Lavanya and N. Kishore, "Different textile printing techniques: Hand block printing, screen printing, and digital printing," *J. Text. Sci. Eng.*, vol. 19, no. 2, pp. 787–802, 2022.
- [8] G. Anand and A. M. Pramanik, "An introduction to sustainable finishing techniques of textiles," *Int. J. Home Sci.*, vol. 8, no. 2, pp. 217–220, 2020.
- [9] K. Thomas *et al.*, "Fundamental challenges and opportunities for textile circularity," *Sustainability*, vol. 16, no. 24, 2024, Art. no. 11117.
- [10] F. Murmura *et al.*, "Lean Six Sigma for the improvement of company processes: The Schnell S.p.A. case study," *TQM J.*, vol. 33, no. 7, pp. 351–376, 2018, doi: <https://doi.org/10.1108/TQM-06-2021-0196>.
- [11] A. Ali *et al.*, "Hydrophobic treatment of natural fibers and their composites—A review," *J. Indus. Text.*, vol. 47, no. 8, pp. 2153–2183, June 2016, doi: <https://doi.org/10.1177/1528083716654468>.
- [12] M. Tarai and S. Yadav, "Advances in textile finishing," *Int. J. Res. Trends Inn.*, vol. 9, no. 4, pp. 26–32, 2020.
- [13] S. Parmar and T. Malik. Home textiles: A review. (2020). [Online]. Available: https://www.researchgate.net/publication/326508042_Home_Textiles-A_Review_Home_Textiles-A_Review
- [14] R. Baloyi *et al.*, "Recent advances in recycling technologies for waste textile fabrics: A review," *Text. Res. J.*, vol. 94, no. 3, pp. 508–529, Nov. 2023, doi: <https://doi.org/10.1177/00405175231210239>.
- [15] T. Ahmed *et al.*, "Implementation of the Six Sigma methodology for reducing fabric defects on the knitting production floor: A sustainable approach for knitting industry," *Text. Leather Rev.*, vol. 5, pp. 223–239, 2023, doi: <https://doi.org/10.31881/TLR.2022.29>.
- [16] C. J. Moin, K. R. Hossain, and L. M. Baral, "Investigating root causes of sewing defects using TQM tools for quality improvement in the knit garment industry," *Text. Leather Rev.*, vol. 6, pp. 417–433, Sep. 2023, doi: <https://doi.org/10.31881/TLR.2023.071>.
- [17] R. L. Karwande, S. P. Bhosle, and P. M. Ambad, "A review of Six Sigma approach to enhance performance in manufacturing industries," in *Proc. Int. Conf. Appl. Mach. Intell. Data Anal.*, Aurangabad, India, 2017, pp. 654–663.
- [18] R. Sekhar, S. Shaikh, I. Akbani, and N. S. Solke, "Pareto analysis-based investigation and reduction of welding-defects in automobile ring

- gear/flex plate assembly,” *Int. J. Appl. Eng. Res.*, vol. 10, no. 4, pp. 9811–9818, 2015.
- [19] H. Z. Ozek and D. Y. Ayakta, "TPM project for remedying weft distortions in a textile mill," *J. Text. Sci. Technol.*, vol. 11, no. 1, pp. 6–13, 2019, doi: <https://doi.org/10.15406/jteft.2025.11.00397>.
- [20] T. Islam and M. A. Halim, "Washing defects and remedial actions of denim garments and statistical review of denim sectors in emerging economy," *J. Manag. Sci. Eng. Res.*, vol. 4, no.1, pp. 30–40, 2020, doi: <https://doi.org/10.30564/jmser.v4i1.2941>.
- [21] R. D. Adikorley, L. Rothenberg, and A. Guillory, "Lean Six Sigma applications in the textile industry: A case study," *Int. J. Lean Six Sigma*, vol. 8, no. 2, pp. 210–224, 2017, doi: <http://dx.doi.org/10.1108/IJLSS-03-2016-0014>.
- [22] G. Jiménez-Delgado *et al.*, "Implementation of Lean Six Sigma to improve the quality and productivity in the textile sector: A case study," Presented at 14th Int. Conf., Held Part 25th HCI Int. Conf., Copenhagen, Denmark, July 23–28, 2023.
- [23] S. Tampubolon and H. H. Purba, "Lean Six Sigma implementation, a systematic literature review,” *Int. J. Product. Manag. Eng.*, vol. 9, no. 2, pp. 125–139, July 2021, doi: <http://dx.doi.org/10.4995/ijpme.2021.14561>.
- [24] T. A. V. Nguyen, K. H. Nguyen, and D. Tucek, "Total quality management 4.0 framework: Present and future," *Oper. Supply Chain Manag.*, vol. 16, no. 3, pp. 311–322, 2023.
- [25] A. Susmita, "A systematic literature review of Total Quality Management (TQM) implementation in organization," *Indones. J. Indust. Eng. Manag.*, vol. 2, no. 1, pp. 68–80, Feb. 2021. doi: <https://doi.org/10.22441/ijjem.v2i1.10591>
- [26] A. H. Gomaa, "LSS 4.0: A conceptual framework for integrating Lean Six Sigma and Industry 4.0 for smart manufacturing excellence," *Indian J. Manag. Lang.*, vol. 5, no. 1, pp. 8–9, Apr. 2025. doi: <https://doi.org/10.54105/ijml.H1810.05010425>.
- [27] M. Zia-ur-Rehman, M. Hashim, H. U. Rehman, and A. Khan, "Enablers and barriers for adoption of Lean system: A mix method approach," *Int. J. Product. Qual. Manag.*, vol. 35, no. 2, pp. 220–240, Mar. 2022.